

## Important!


System is set for now as 4:3 to fit the current screen.

Remote is in the 'Benq' bag in the 1812 cupboard.

When switching on make sure lens cap is off.

When switching off make sure it has cooled down before switching off at the wall, wait till fan noise stops and there is a double bleep from the projector before unplugging

HDMI and VGA inputs

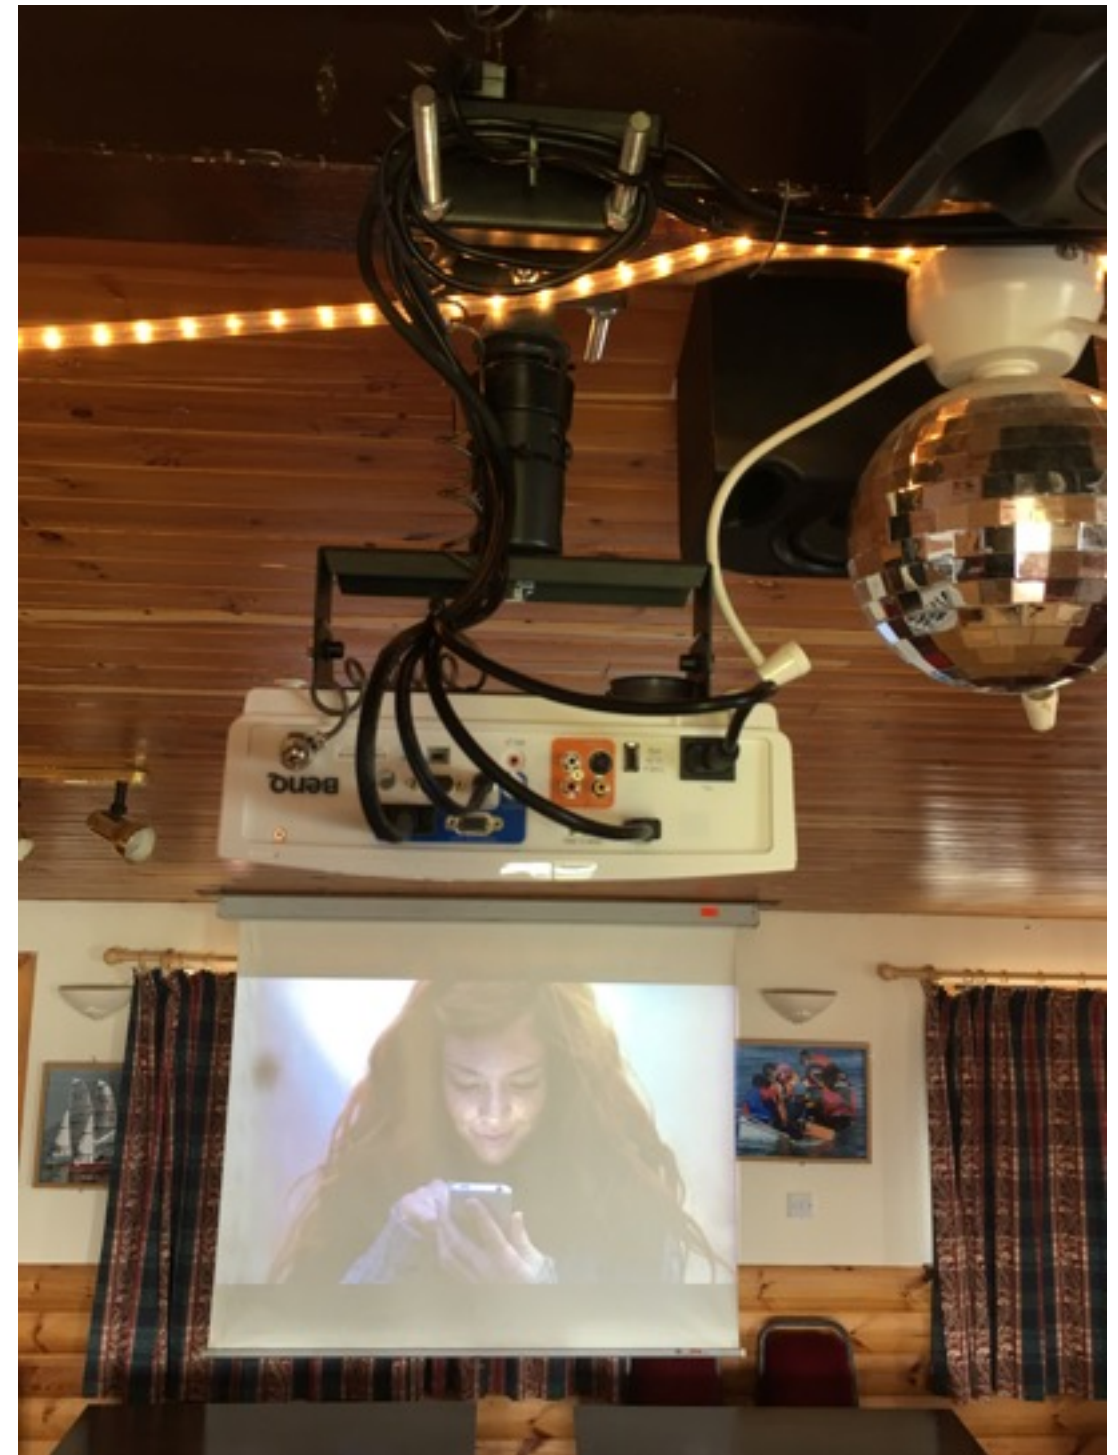

Title: DBSC Projector Installation (Draft)

AV Department Limited

[www.avdept.co.uk](http://www.avdept.co.uk)

01383 825709



Switch on  
Projector and  
connect your  
source




VGA input



When using the VGA  
input, select Computer 1  
on the projector remote.

If using audio connect the  
3.5mm jack under the  
amp into the computer  
headphone socket and  
select 'Jack plug for pc,  
mp3 players'

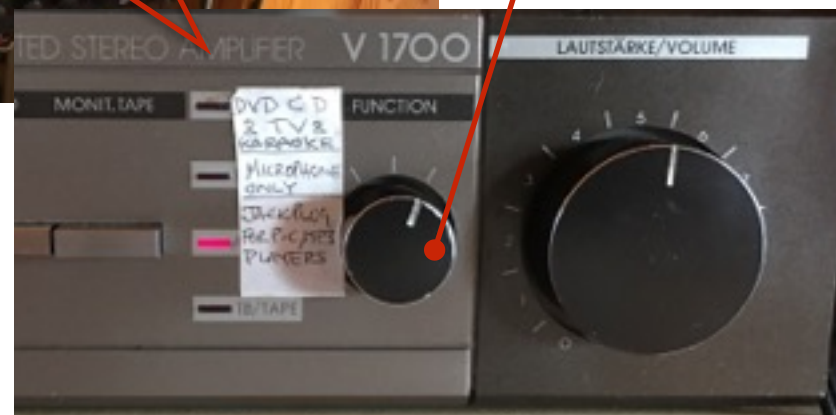

Title: DBSC Projector Installation (VGA input)

AV Department Limited  
[www.avdept.co.uk](http://www.avdept.co.uk)  
01383 825709





Switch on  
Projector and  
connect your  
source



HDMI input



When using the HDMI  
input, select HDMI on the  
projector remote.

If using audio select by  
pushing in the  
'MONIT.TAPE' switch.



N.B. you may also use the 3.5mm jack for audio  
if sound is coming from your laptop speakers  
however if using a copy right protected source,  
like a DVD, you may still need to select the  
'MONIT.TAPE' switch for sound.



Title: DBSC Projector Installation (VGA input)

AV Department Limited

[www.avdept.co.uk](http://www.avdept.co.uk)

01383 825709

